

# AT SERIES

## AC Current Transducers

AT Series AC Current Transducers combine a current transformer and signal conditioner into a single package. These current transducers have jumper-selectable current input ranges and industry standard 4–20 mA, 0–5 VDC or 0–10 VDC outputs. The AT Series AC Current Transducers are designed for application on 'linear' or sinusoidal AC loads and are available in a split-core case or two types of solid-core cases.



### AC Current Transducer Applications

#### Automation Systems

- Analog current reading for remote monitoring and software alarms.


#### Data Loggers

- Self-powered transducer helps conserve data logger batteries.

#### Panel Meters


- Simple connection displays power consumption.

#### Preventative Maintenance of a Critical Lighting System

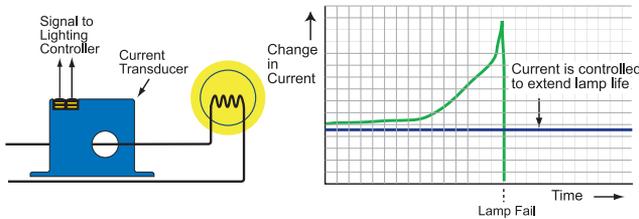

- For additional Application Examples, go to [www.nktechnologies.com/applications](http://www.nktechnologies.com/applications)

### AT Series Power Supply

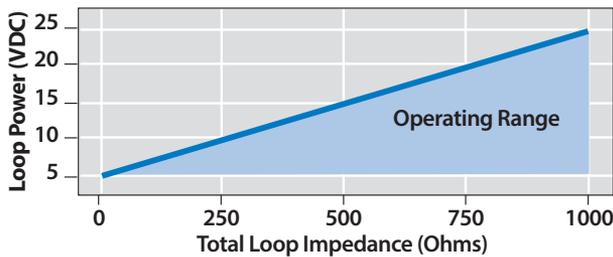

### AC Current Transducer Features

#### Accurate

- Factory matched and calibrated single piece transducer is more accurate than traditional two-piece field installed solutions.

#### Average Responding

- "Average Responding" algorithm gives an RMS output on pure sine waves. Perfect for constant speed (linear) loads.

#### Jumper-selectable Ranges

- Reduces inventory.
- Eliminates zero and span pots.


#### Isolation

- Output is magnetically isolated from the input for safety.
- Eliminates insertion loss (voltage drop).

#### UL/cUL and CE Approved

- Accepted worldwide.

### AC Current Transducer Connections



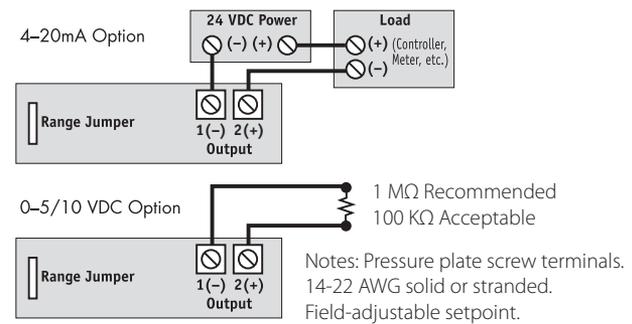


#### OEMs

#### Test & Evaluation Units for OEMs

Free program expedites evaluation process. See page 3 for details.

**AC Current Transducer Dimensions**

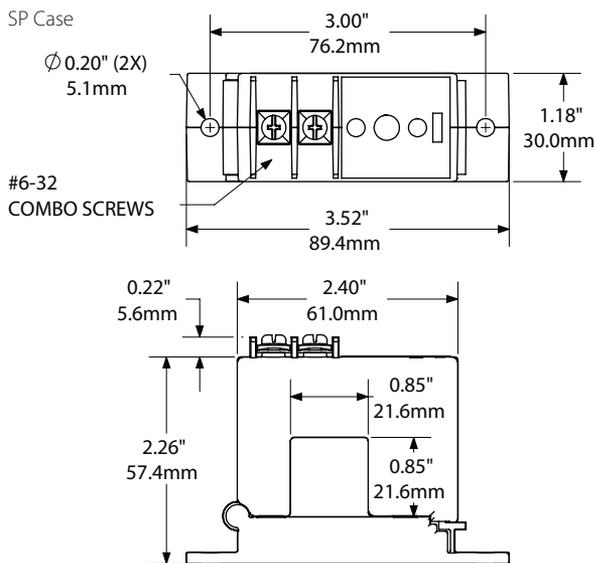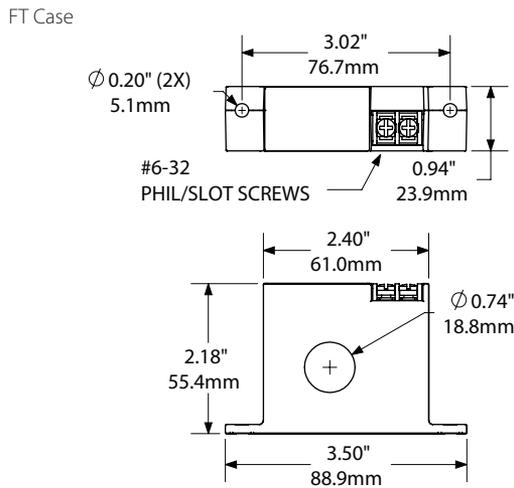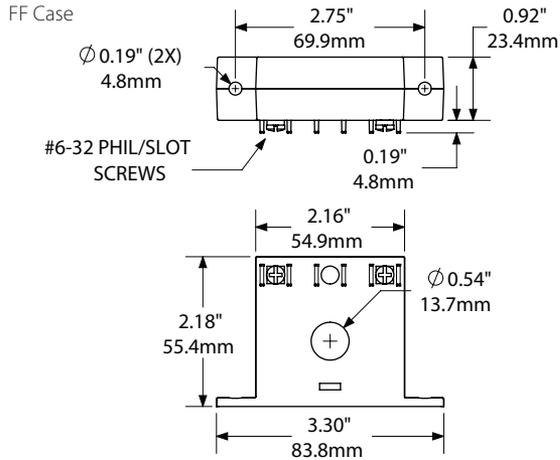

**AC Current Transducer Specifications**



	-005 MODEL	-010 MODEL	-420 MODEL
<b>Power Supply</b>	None, self-powered		5–40 VDC, loop-powered
<b>Output Signal</b>	0–5 VDC	0–10 VDC	4–20 mA
<b>Output Limit</b>	8.2 VDC	15 VDC	32 mA
<b>Output Loading</b>	1 MΩ min., 100 KΩ add 1.3% error		
<b>Accuracy</b>	1.0% FS		
<b>Response Time (90% step change)</b>	100 ms		300 ms
<b>Frequency Range</b>	50–60 Hz		20–100 Hz*
<b>Isolation Voltage</b>	Tested to 1.5 kV		
<b>Input Range</b>	0–200 A field-selectable		
<b>Case</b>	UL94 V-0 Flammability rated		
<b>Environmental</b>	-4 to 122°F (-20 to 50°C) 0–95% RH, non-condensing		
<b>Listings</b>	UL/cUL, CE		

\*For sinusoidal waveforms only. Select ATR Transducers for distorted waveforms.

AC Current Transducers

**AC Current Transducer Ordering Information**

Sample Model Number: AT1-005-000-SP

AC current transducer, 10/20/50 A range, self-powered with a 0–5 VDC output in a split-core case. (DIN rail adapters are included)



**(1) Full Scale Range**

0	2 & 5 A (4–20 mA only)
1	10, 20, 50 A
2	100, 150, 200 A

**(2) Output Signal**

420	4–20 mA
005	0–5 VDC
010	0–10 VDC

**(3) Power Supply**

24L	24 VDC loop-powered (4–20 mA output only)
000	Self-powered (0–5/0–10 VDC output only)

**(4) Case Style**

FF	Solid-core, front terminal
FT	Solid-core, top terminal
SP	Split-core

