

AGT SERIES

Ground Fault Measurement

AGT Series Ground Fault Transducers combine a current transformer and a True RMS signal conditioner into a single package. The AGT Series is designed to produce an analog 4–20 mA signal proportional to earth or ground fault current, or any low consumption AC load. Available in a solid-core case. When connected to a controller or data logger, NEC requirements for alarm can be met.



Ground Fault Transducer Applications

Current Leakage Detection

- Monitor heating or other loads to detect increasing leakage current.
- Pass all current carrying conductors through aperture to sense zero-sum current.

Very Light Loads

- Accurate measurement of very small but critical loads.
- Current measurement gives faster response than temperature measurement.

Ground Fault Transducer Features

True RMS Output

- True RMS technology is accurate on distorted waveforms.

Single Range

- No chance of field range selection errors.
- Eliminates zero and span pots.


Isolation

- Output is magnetically isolated from the input for safety.
- Eliminates insertion loss (voltage drop).

UL/cUL Approved

- Accepted worldwide.

Ground Fault Currents

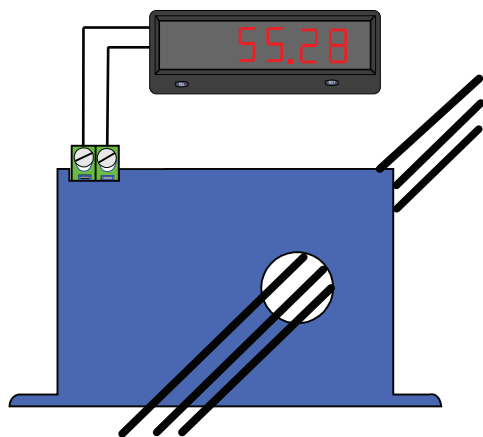

- For additional Application Examples, go to www.nktechnologies.com/applications

Selecting the right ground fault detector:


NEC Article 427-22 requires that fault currents be monitored on industrial equipment. However, where maintenance and supervision ensure that only qualified persons will service the equipment and continued circuit operation is necessary for safe operation and processes, alarm indication is also required. A fault current transducer can send a signal to a panel meter with alarm contacts or a controller. As an example, the alarm points can be configured so one alarm is initiated when fault current reaches 30 mA, and another when it rises above 70 mA. Ground fault protection is required in many applications, and NK Technologies has a sensor that can be coupled with your control system to provide this needed alarm or circuit disconnection.

OEMs


Test & Evaluation Units for OEMs

Free program expedites evaluation process. See page 3 for details.

Ground Fault Transducer Dimensions

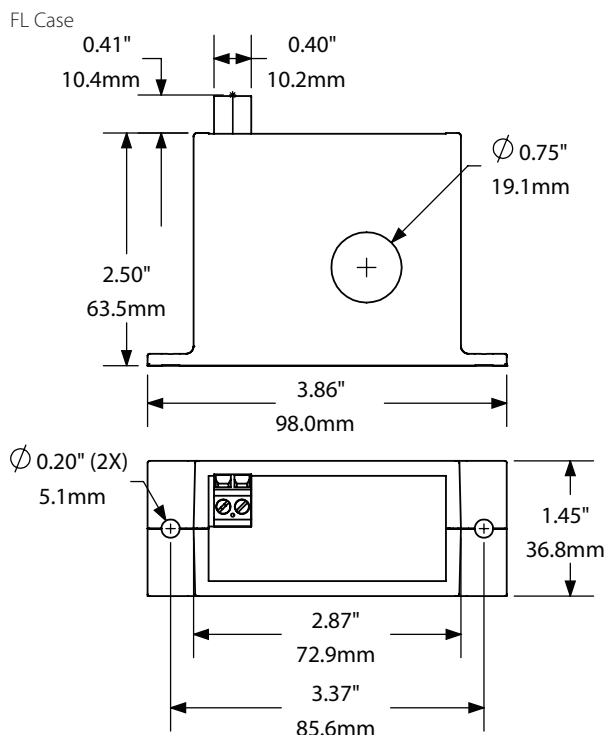

Ground Fault Transducer Connections

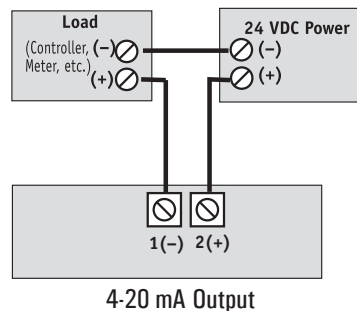

Notes:

- Finger safe captive screw terminals.
- 30-12 AWG solid or stranded.
- Observe polarity.

Ground Fault Transducer Specifications



Power Supply	24 VDC loop-powered (12-32 V)
Power Consumption	<2 VA
Output Signal	4-20 mA, loop-powered (True RMS respond)
Output Limit	23 mA
Output Loading	600 Ω max. @ 24 VDC
Response Time	600 ms (to 90% step change)
Input Range	Single range of 0-50 or 0-100 mA; custom ranges available; consult factory.
Isolation Voltage	Tested to 2200 VAC
Frequency Range	40-400 Hz
Case	UL94 V-0 Flammability Rated
Environmental	-4 to 104°F (-20 to 40°C) 0-95% RH, non-condensing
Listings	UL/cUL

Ground Fault Transducer Ordering Information

Sample Model Number: AGT2-420-24L-FL

True RMS AC ground fault transducers, 100 mA ranges, 4-20 mA output, 24 VDC loop-powered in a solid-core case.

AGT (1) - (2) - (3) - (4)

AGT - - -

(1) Full Scale Range

1	0-50 mA
2	0-100 mA

(2) Output Signal

420	4-20 mA
-----	---------

(3) Power Supply

24L	24 VDC loop-powered (4-20 mA output ONLY)
-----	---

(4) Case Style

FL	Solid-core, top terminal
----	--------------------------

OEMs

Test & Evaluation Units for OEMs

Free program expedites evaluation process. See page 3 for details.

