

VT3-OS SERIES

Three-Phase Voltage Transducers

The VT3-OS Series Voltage Transducers are high-performance, True RMS transducers designed for accurate voltage sensing in three-phase applications. Housed in a DIN rail or panel mount case, the VT3 monitors common three-phase voltage ranges (120, 240, and 480 VAC) up to 600 VAC and includes Phase Loss Detection with an SPST Form A relay. Available in 3-wire (Line-Line) or 4-wire (Line-Neutral) voltage configurations, it provides industry-standard analog outputs proportional to the connected voltage.



Power Monitoring Applications

True RMS Voltage Monitoring

- Detect below normal or “brownout” voltage conditions to prevent motor overheating.
- Monitor sinusoidal or non-sinusoidal waveforms in relevant applications.
- Identify over-voltage conditions associated with regenerative voltage to diagnose and avoid motor drive issues.
- Detect voltage conditions that could stress or damage soft start components.
- Identify phase loss conditions by detecting voltage reduction.

3-Phase Voltage Transducer Features

Monitor 3-Phase Voltage Inputs

- Measures True RMS voltage individually for all three phases.
- Provides an additional output with the average RMS voltage across all three phases.
- Ideal for challenging electrical environments and non-sinusoidal power applications.

Industry-Standard Output Options

- Offers industry-standard output options (4–20 mA, 0–5 or 0–10 VDC).
- Compatible with existing PLC controllers, data loggers and SCADA equipment.

Phase Loss Detection

- SPST Form A relay activates when voltage drops below threshold.

Externally Powered


- Externally powered (24 VAC/VDC) with low consumption.

UL/cUL Listed, CE Certified

- Accepted worldwide.


Mount Options

- Snap case onto a DIN rail, or mount directly to panel using screws.
- Need a DIN Rail? The optional DIN Rail Kit (DINKIT) includes a 175 mm wide DIN rail and two end stops.

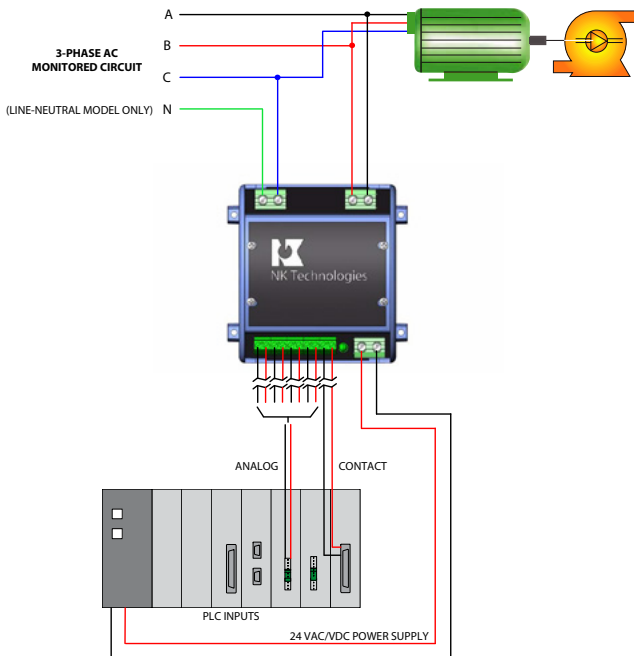




Voltage Transducer Dimensions

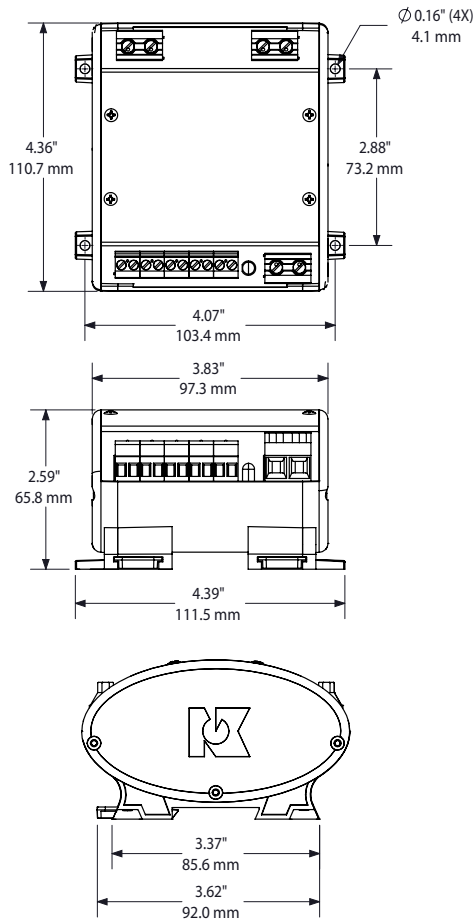

Voltage Transducer Connections

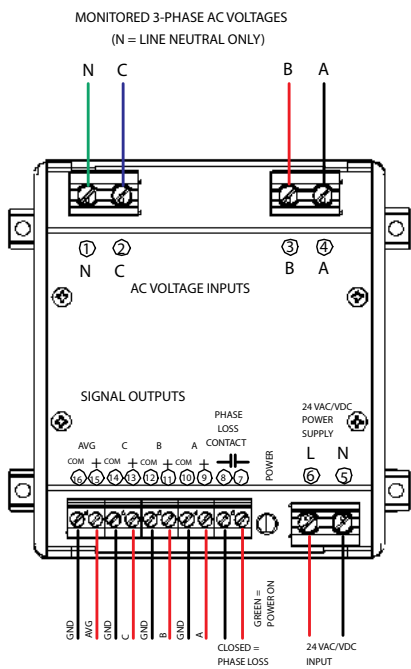

Voltage Transducer Specifications

| | |
|--|---|
| Power Supply | 24 VAC/VDC (+/-10%) |
| Power Consumption | <4.4 VA 0-5, 0-10 V output <6 VA 4-20 mA output |
| Input Range Line-Line Line-Neutral | 0-150, 0-300, 0-600 VAC 0-150, 0-300 VAC |
| Input Frequency Range | 50-60 Hz |
| Input Impedance | 400 K Ω |
| Output Signal | <ul style="list-style-type: none"> • 4-20 mA (capped at 20 mA) • 0-5 VDC (capped at 5 VDC) • 0-10 VDC (capped at 10 VDC) |
| Response Time | 200 ms (to 90% step change) |
| Accuracy | <1% FS |
| Output Loading | <ul style="list-style-type: none"> • 4-20 mA output: <500 Ω • 0-5/0-10 VDC output: >10 KΩ |
| Phase Loss Detection Relay | SPST Form A Relay Contact 1 A @ 30 VDC; 0.5 A @ 125 VAC |
| Isolation Voltage | 1250 VAC |
| Case | UL94 V-0 Flammability Rated noncorrosive thermoplastic |
| Environmental | -4 to +140°F (-20 to +60°C) 0-95% RH, non-condensing |
| Listings | UL Listed to UL 508 (NRNT.E129625), CE |

Voltage Transducer Ordering Information

Sample Model Number: VT3-LL2-420-24U-OS
Three-phase voltage transducer, 0-300 VAC Line-Line input with proportional 4-20 mA output, powered by 24 VAC/VDC in a DIN rail compatible case.



(1) Range

| | |
|-----|---|
| LL1 | 0-150 VAC, Line-Line, Phase Loss @ 90 VAC |
| LL2 | 0-300 VAC, Line-Line, Phase Loss @ 180 VAC |
| LL3 | 0-600 VAC, Line-Line, Phase Loss @ 360 VAC |
| LN1 | 0-150 VAC, Line-Neutral, Phase Loss @ 90 VAC |
| LN2 | 0-300 VAC, Line-Neutral, Phase Loss @ 180 VAC |

(2) Output

| | |
|-----|----------|
| 420 | 4-20 mA |
| 005 | 0-5 VDC |
| 010 | 0-10 VDC |

(3) Power Supply

| | |
|-----|------------|
| 24U | 24 VAC/VDC |
|-----|------------|

(4) Case Style

| | |
|----|-------------------------|
| OS | DIN Rail or Panel Mount |
|----|-------------------------|

Voltage Transducers

