


# ASM SERIES

## Self-calibrating Current Sensing Smart Switches

The patented design of the ASM Series Self-calibrating Smart-Switch is more accurate and easier to use than previous models. This Smart-Switch uses the actual load current to set the trip point. It takes just a couple of seconds of steady running conditions before the sensor locks onto the normal current level. The ASM Series is designed for overload, underload or operating window applications. Upon sensing an average operating current, the ASM self-learns and establishes a limit-alarm trip point based on 85–125% of normal current (overload/underload model only). Available in a solid- or split-core case.

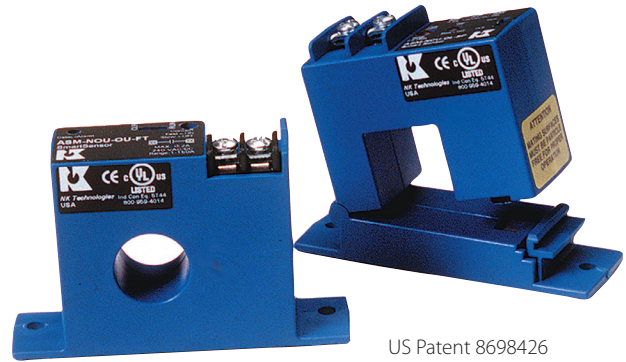

US Patent 8698426

### Current Sensing Switch Applications

#### Conveyors (-OL Option)

- Detects jams and overloads.
- Interlocks multiple conveyor sections.

#### Electronic Proof of Flow (-UL Option)

- More reliable than electromechanical pressure or flow switches. No need for pipe or duct penetrations.

#### Pump Protection (-OU Option)

- Provides overload (jams) and underload (suction loss) indication.
- Interlocks multiple conveyor sections.

### Current Sensing Switch Features

#### Self-powered and Self-calibrating

- Speeds startup, cuts installation costs.

#### Status Monitoring, Overload, and Operating Window Options


- Choose the operating style that matches your application.

#### Universal Output

- AC or DC compatibility with any automation system.

#### UL/cUL and CE Approved

- Accepted worldwide.

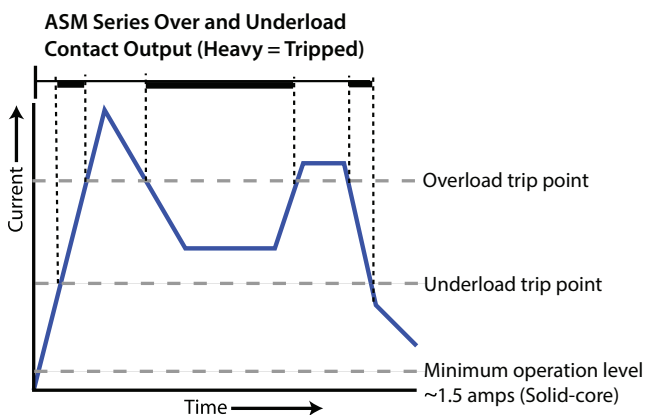

- For additional Application Examples, go to [www.nktechnologies.com/applications](http://www.nktechnologies.com/applications)


OEMs

#### Test & Evaluation Units for OEMs


Free program expedites evaluation process. See page 3 for details.

## Current Sensing Switch Dimensions

FT Case

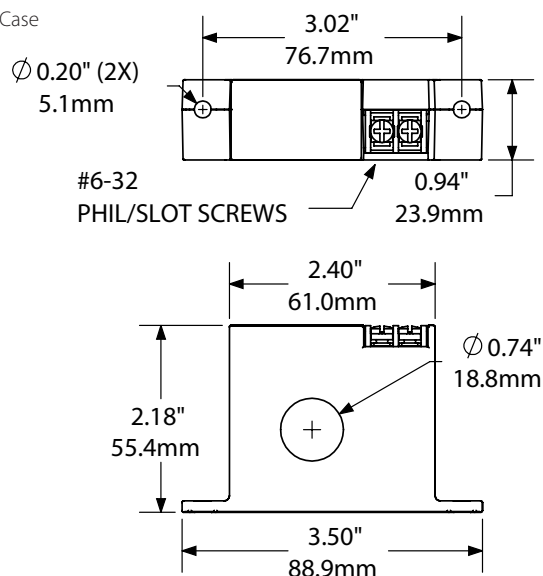

SP Case

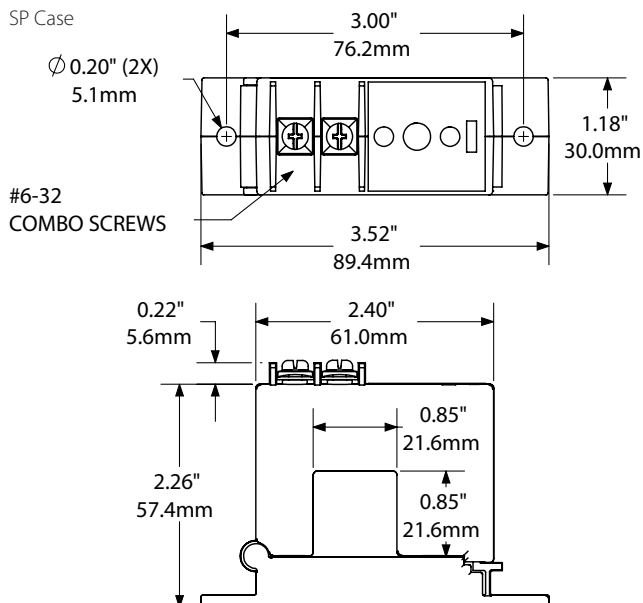

## Current Sensing Switch Specifications



<b>Power Supply</b>	None, self-powered
<b>Setpoint Range</b>	<ul style="list-style-type: none"> <li>• Solid-core: 1.5–150 A (self-calibrating)</li> <li>• Split-core: 2.8–150 A (self-calibrating)</li> </ul>
<b>Output Switch</b>	Isolated solid-state switch
<b>Setpoint Calibration</b>	Output changes with AC current between 85% and 125% of normal running current
<b>Output Rating</b>	<ul style="list-style-type: none"> <li>• N.O. Version: 0.30 A @ 135 VAC/VDC</li> <li>• N.C. Version: 0.20 A @ 135 VAC/VDC</li> <li>• Not polarity sensitive</li> </ul>
<b>Off-state Leakage</b>	<10 $\mu$ A
<b>Response Time</b>	200 ms
<b>Time Delay</b>	None
<b>Hysteresis</b>	5%
<b>Overload</b>	500 A @ 6 sec, 1000 A @ 1 sec.
<b>Isolation Voltage</b>	UL listed to 1270 VAC
<b>Frequency Range</b>	6–100 Hz
<b>Case</b>	UL94 V-0 Flammability Rated
<b>Environmental</b>	-4 to 122°F (-20 to 50°C) 0–95% RH, non-condensing
<b>Listings</b>	UL/cUL, CE

## Current Sensing Switch Ordering Information

Sample Model Number: ASM-NOU-OL-SP  
AC current sensing switch, normally open, self-calibrating overload operation in a split-core case. (DIN rail adapters are included)

ASM – (1) – (2) – (3)

### (1) Output Rating

NOU	Normally Open
NCU	Normally Closed

### (2) Operation

OL	Overload
UL	Underload
OU	Over/underload

### (3) Case Style

FT	Solid-core, top terminals
SP	Split-core